
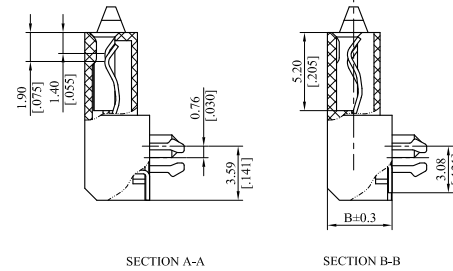
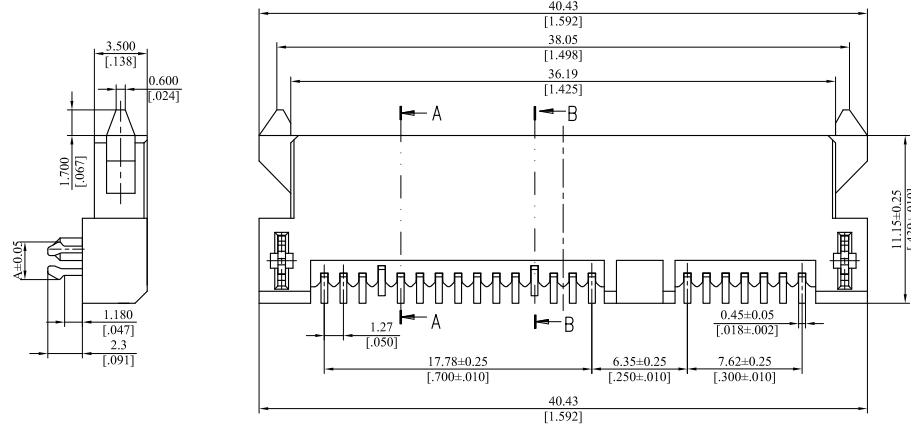


RoHS COMPLIANT

CUSTOMER DRAWING

REV.	ECO. NO.	DESCRIPTION	DATE
A	DWG. REL.	APPROVED	
B	ES181004	Change: C1:2.0-->2.3; C4:11.20-->11.15	2018.10.22

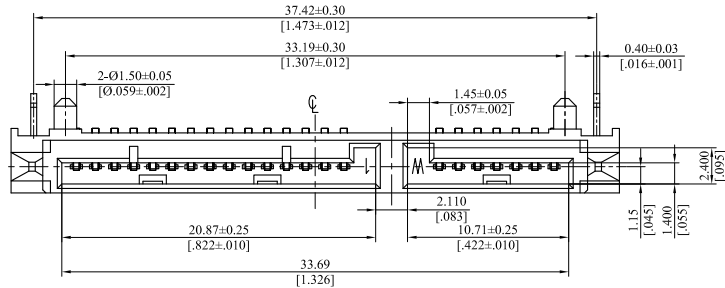


Note:

Material:  
 Insulator: High Temperature Thermoplastic, UL94 V-0, Black  
 Contact: Phosphor Bronze  
 Harpoon: Brass/Tin plated 100µ" min  
 Specification:  
 Current Rating: 1.5A AC DC  
 Voltage Rating: 30V AC DC  
 Temperature Rating: -55 °C~+85 °C

General Part Number:

1283S 22 M \* \* B  
 1 2 3

- No. of circuits
- F=Selective gold flash  
 J=Selective 15µ" gold
- 1: Dim A=2.5mm(.098")  
 Dim B=4.3mm(.169")  
 3: Dim A=2.4mm(.094")  
 Dim B=5.0mm(.197")

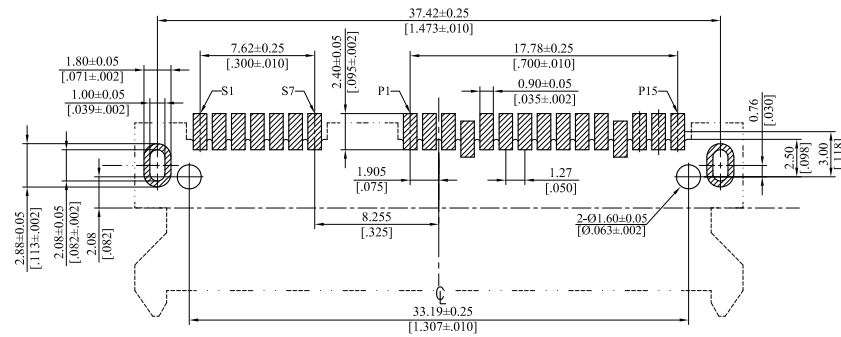

Signal Segment		Power Segment			
Name	Type	Name	Type	Name	Type
S1	GND	P1	V3.3	P9	V5
S2	A+	P2	V3.3	P10	GND
S3	A-	P3	V3.3	P11	DAS/DSS
S4	GND	P4	GND	P12	GND
S5	B-	P5	GND	P13	V12
S6	B+	P6	GND	P14	V12
S7	GND	P7	V5	P15	V12
		P8	V5		

TOLERANCE UNLESS OTHERWISE SPECIFIED			<b>LEOCO CORPORATION</b> <a href="http://www.leoco.com.tw">http://www.leoco.com.tw</a>		
mm			APPROVED BY:	DATE:	TITLE:
[inch]	mm	inch	Chard	2018.10.22	SATA 22P FEMALE SMT TYPE
1 PLACE	± 0.30	± --	CHECKED BY:	DATE:	
2 PLACES	± 0.20	± .012	Spring	2018.10.22	PART NO.: 1283S22M**B
3 PLACES	± 0.10	± .008	DRAWN BY:	DATE:	
4 PLACES	± --	± .004	Shirley	2018.10.22	DRAWING NO.: 128302S
ANGULAR ±1°			SIZE: A3	SCALE: 1:1	REV.: B
					SHEET: 1 OF 1