

\*\*\* 1371 Series \*\*\*

Material:

Insulator: Nylon-6T, UL94V-0

Contact: Brass

Ordering Information:

1371P \*\*\* \*\*  
1 2 3

1. No. of circuits. (Available in 4 through 100 contact)

2. Plating:

T=Tin plated 120u"min. 30u"min. nickel overall

U=Gold flash over 30u"min. nickel overall

F=Selective gold flash over 30u"min. nickel overall

J=15u"min. gold plated selective over 30u"min. nickel overall

K=30u"min. gold plated selective over 30u"min. nickel overall

3. Special options



00: C= 2.80mm(.110")

D= 2.60mm(.102")


L1: C= 6.00mm(.236")

D= 3.00mm(.118")


RoHS COMPLIANT

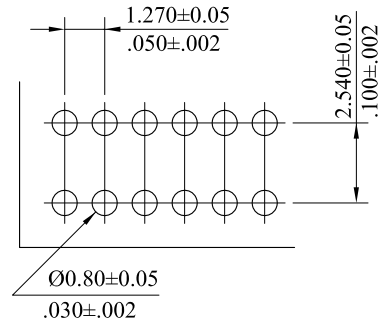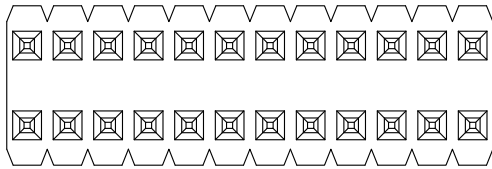

Recommended Hole Pattern

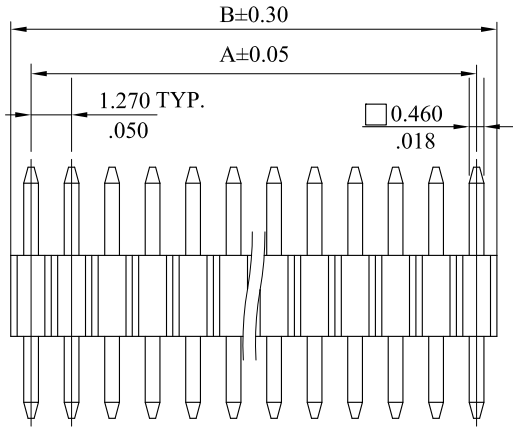

A=1.270mm \* No. of spaces  
B=A + 1.270mm

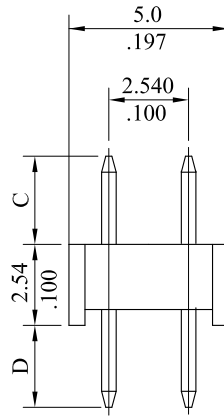

				LEOCO CORPORATION		APPROVED:		PART NO.:				
				GENERAL TOLERANCES: (UNLESS SPECIFIED)		DATE:		1371P*****				
						CHECKED:		TITLE:				
						DATE:		HEADER				
						DRAWN:		DRAWING NO.:				
						DATE:		137101S				
B	ES101222			1 PLACE	± 0.30	± --		UNITS	SCALE	SIZE	SHEET	REV.
A	DWG REL			2 PLACES	± 0.20	± .012		mm	4:1	A4	1/1	B
REV.	ECO. NO.	CHG.	APP.	3 PLACES	± 0.10	± .008	inch					
				4 PLACES	± --	± .004						
				ANGULAR ± ( 1° )								