

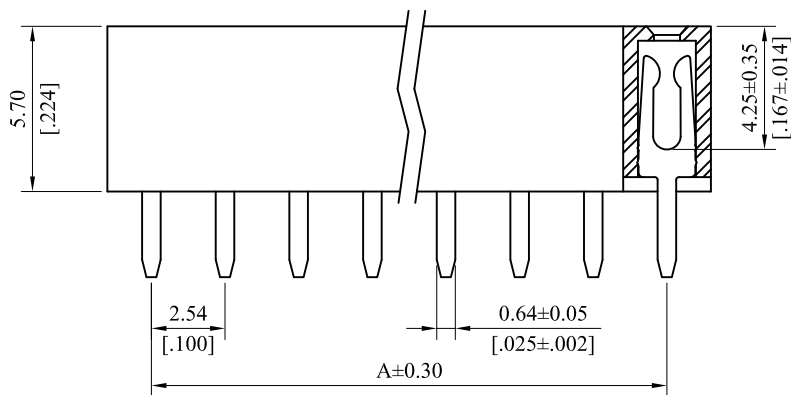


RoHS COMPLIANT

| CUSTOMER DRAWING | | |
|------------------|-----------|---|
| REV. | ECO. NO. | DESCRIPTION |
| A | DWG. REL. | APPROVED |
| B | E980386 | |
| C | ES050423 | |
| D | ES071009 | |
| E | ES101238 | |
| F | ES161204 | D-3: 0.74→0.64 Material: Phosphor bronze→Brass |

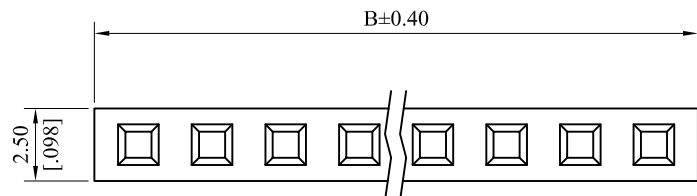


Material:
Insulator: PBT, UL94V-0,Black
Contact: Brass

General Part Number:
2594S ^{**} V ^{*} 00
1 2

- 1.No.of circuits(1~40)
- 2.Plating

T=Tin plated 120u" min. over 30u" min. Nickel underplating overall
U=Gold flash over 30u" min. Nickel underplating overall
W=15u" min.Gold over 30u" min. Nickel underplating overall
Z=30u" min.Gold over 30u" min. Nickel underplating overall

A=2.54mm *No.of spaces
B=A+2.94mm

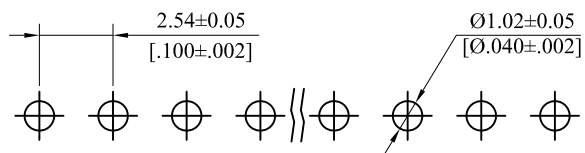

Recommended PCB Layout

| TOLERANCE UNLESS OTHERWISE SPECIFIED | | | LEOCO CORPORATION <i>http://www.leoco.com.tw</i> | | |
|--------------------------------------|--------|--------|---|------------|--------------------------|
| mm | mm | inch | APPROVED BY: DATE: | | TITLE: |
| [inch] | | | Chard | 2016.12.05 | |
| 1 PLACE | ± 0.30 | ± --- | CHECKED BY: DATE: | | 2.54 Pitch Socket |
| 2 PLACES | ± 0.20 | ± .012 | Angel | 2016.12.05 | |
| 3 PLACES | ± 0.10 | ± .008 | DRAWN BY: DATE: | | PART NO.: 2594P**V*00 |
| 4 PLACES | ± --- | ± .004 | Spring | 2016.12.05 | |
| ANGULAR ±1° | | | SIZE: A3 | SCALE: 1:1 | DRAWING NO.: 259401S |
| | | | | | REV.: F |
| | | | | | SHEET: 1 OF 1 |