
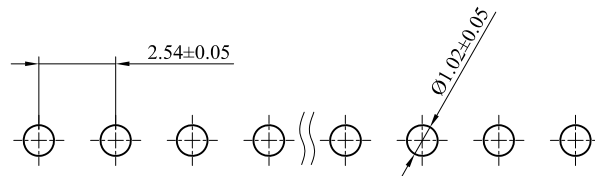
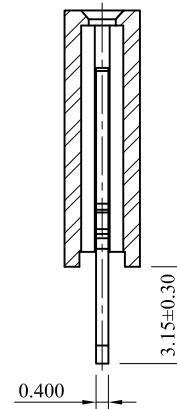
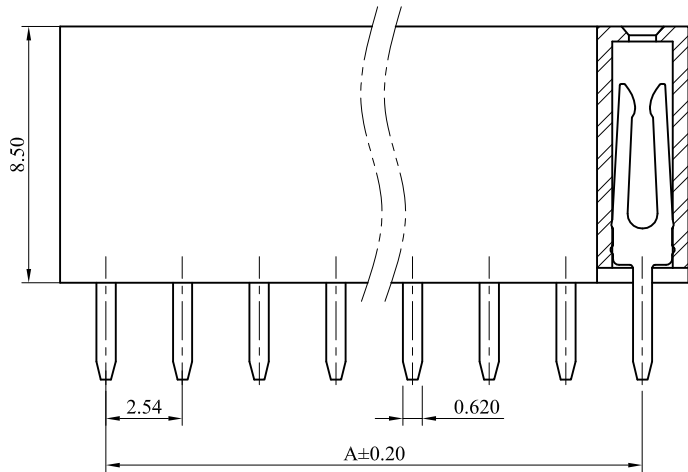


REV.	ECO. NO.	DESCRIPTION	DATE
B	ES050501		
C	ES101227		2010.12.17
D	ES180127	UPDATE	2018.01.26
E	ES210717	Material Insulator: Thermoplastic→ High Temperature Thermoplastic	2021.10.13
F	ES220603	Add plating option "B"	2022.06.14

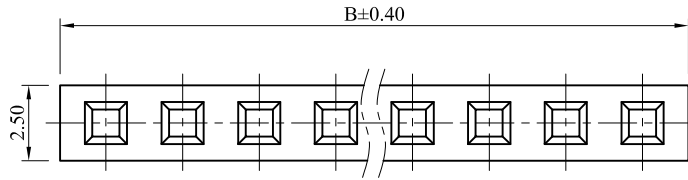

Recommended PCB Layout

Note:
Material:
Insulator: High Temperature Thermoplastic,UL94V-0,Black
Contact: Brass

General Part Number:

3594S **V * 00
1 2

1.No.of circuits(01~40)

2.Plating:

- T= Tin plated 120µ" min. over 30µ" min. Nickel underplating overall
- U= Gold flash over 30µ" min. Nickel underplating overall
- W= 15µ" min. Gold over 30µ" min. Nickel underplating overall
- Z= 30µ" min. Gold over 30µ" min. Nickel underplating overall
- B= Selective 10u" min, Gold on contact area over Gold flash overall

A=2.54mm*No.of spaces

B=A+3.04mm

TOLERANCE UNLESS OTHERWISE SPECIFIED			LEOCO CORPORATION http://www.leoco.com.tw		
mm	mm	inch	APPROVED BY: Chard	DATE: 2022.06.15	TITLE: 2.54mm Pitch Socket
1 PLACE	± 0.30	± ---	CHECKED BY: Angel	DATE: 2022.06.15	
2 PLACES	± 0.20	± ---	DRAWN BY: Janey	DATE: 2022.06.15	PART NO.: 3594S**V*00
3 PLACES	± 0.10	± ---	SIZE: A3	SCALE: 1:1	DRAWING NO.: 359402S
4 PLACES	± ---	± ---			
ANGULAR ±1°					SHEET: 1 OF 1