

\*\*\* 7621 Series \*\*\*

Ordering Information :

7621 - 06 06 \* S  
 $\frac{1}{2}$

Material:





\* Insulator: UL94V-0 PBT

\* Contact: Phosphor Bronze

RoHS COMPLIANT

1. Contact plating:

- U=Gold flash over 30μ "min. nickel overall
  - W= 15μ "min. gold over 30μ " min. nickel overall
  - Z= 30μ "min. gold over 30μ " min. nickel overall
  - G= 50μ "min. gold over 30μ " min. nickel overall
  - L=50μ"min. Selective gold on contact area over 30μ" min. nickel overall,  
 Tin plated on solder or other area
2. S = With metal shell

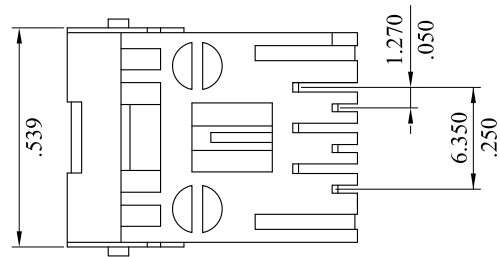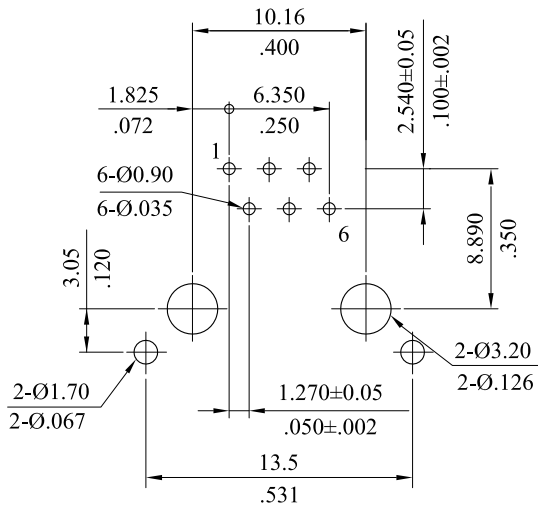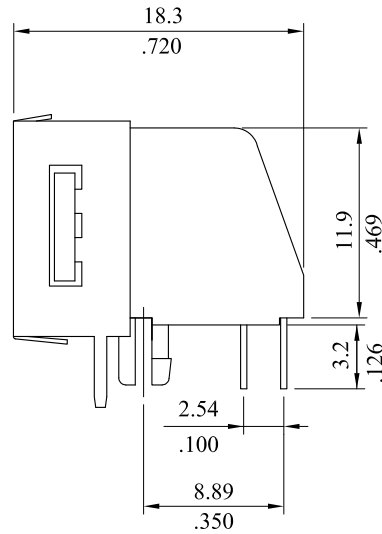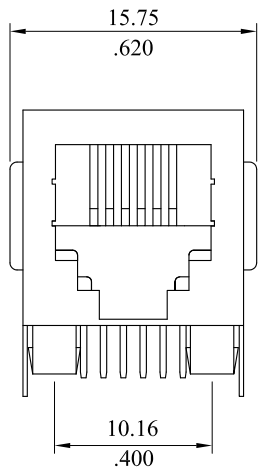

Recommended PCB Hole Pattern

				<b>leoco</b> LECO CORPORATION		APPROVED:		PART NO.:				
				GENERAL TOLERANCES: (UNLESS SPECIFIED)		DATE:		7621-0606*S				
C	ES101221					CHECKED:		TITLE: PCB Mount Telephone Jack				
B	ES071028					DATE:		DRAWING NO.:				
A	DWG REL					DRAWN: Danny		762111S				
REV.	ECO. NO.	CHG.	APP.			DATE: 10.12.08		UNITS	SCALE	SIZE	SHEET	REV.
						ANGULAR ± ( 1° )		$\frac{mm}{inch}$	2:1	A4	1/1	C