

Ordering Information :

7630 - 04 04 * *
 $\frac{1}{1} \frac{2}{2}$

RoHS COMPLIANT

1. Plating :

- U=Gold flash over 30μ "min. nickel overall
- W= 15μ "min. gold over 30μ "min. nickel overall
- Z= 30μ "min. gold over 30μ "min. nickel overall
- G= 50μ "min. gold over 30μ "min. nickel overall




*** 7630 Series ***

Material :


- * Insulator: UL 94V-0 PBT
- * Contact: Phosphor Bronze

2. Options :

- A=Without key, color: black
- B=With key, color: black

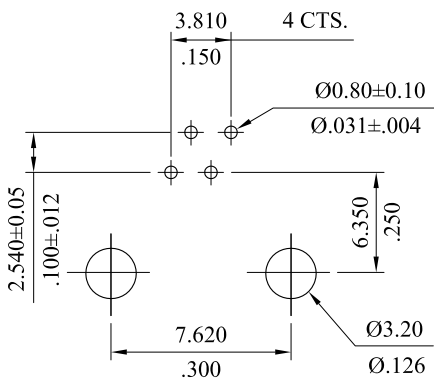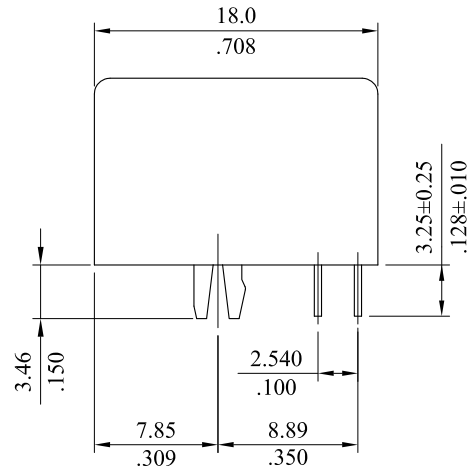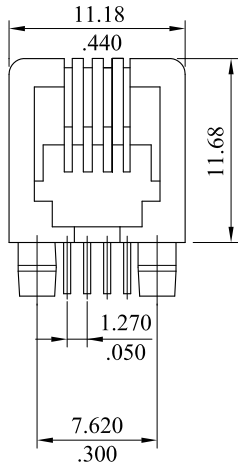

Recommended Hole Pattern

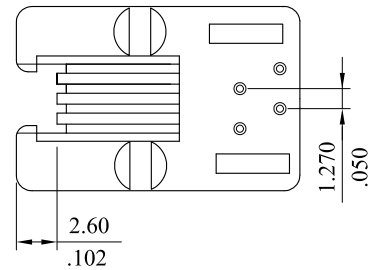

				leoco LEOCO CORPORATION		APPROVED:		PART NO.:				
				GENERAL TOLERANCES: (UNLESS SPECIFIED)		DATE:		7630-0404**				
						CHECKED:		TITLE:				
C	ES101204					DATE:		Low Profile Side Entry P.C.B JACK				
B	ES071028			1 PLACE ± 0.30 ± --		DRAWN:		DRAWING NO.:				
A	DWG REL			2 PLACES ± 0.20 ± .012		DATE:		763005S				
REV.	ECO. NO.	CHG.	APP.	3 PLACES ± 0.10 ± .008				UNITS	SCALE	SIZE	SHEET	REV.
				4 PLACES ± -- ± .004				$\frac{mm}{inch}$	2:1	A4	1/1	C
				ANGULAR ± (1°)								